

Wideband Vehicle Mount Antenna

1620 – 2240 MHz



Product Code: VMA – 1622

Version 1.0

SPECIFICATIONS

Electrical:	
Frequency Range	1620 - 2240 MHz
VSWR	<2:1
Gain	4.45 dBi
Polarization	Linear
Input Impedance	50 Ohms
Connector	N-Female
Feed power Handling	200 Watts
Mechanical:	
Dimensions (l x d)	365 mm x 30 mm (radome) x 140 mm (base)
Weight	<0.82 kg
Environmental	
Operating Temp	-20°C to +70°C
Storage Temp	-40°C to +80°C
Wind Rating	180 Km/Hr
Mounting Type	Vehicle Mount (NATO 4-Holes)
Construction	6063T6 Aluminum, UV-resistant ABS
Environmental Rating	IP67



VMA-1622

PRODUCT DESCRIPTION:

The VMA-1622 is an omni-directional, wideband, high power, vehicle-mount antenna designed for high-power applications from 1620 to 2240 MHz.

PRODUCT FEATURES:

- Wide frequency coverage (1800 to 2200 MHz)
- High-power, 150 W at 100% duty cycle
- Good VSWR (less than 2:1)
- Omni-directional azimuth pattern
- Rugged and waterproof

APPLICATIONS:

- Improvised explosive device (IED) Suppression
- Communications interception




Wideband Vehicle Mount Antenna

1620 – 2240 MHz



TEST CONDITIONS:

- S-parameters were measured using Anritsu MS46122B VNA.
- Farfield Radiation pattern measurements were carried out in Anechoic Chamber.

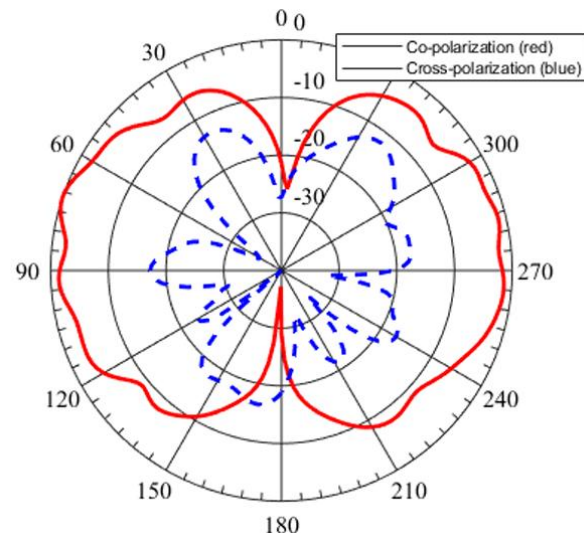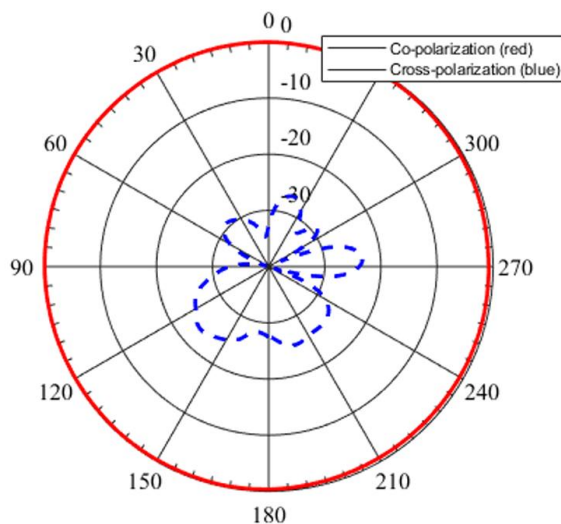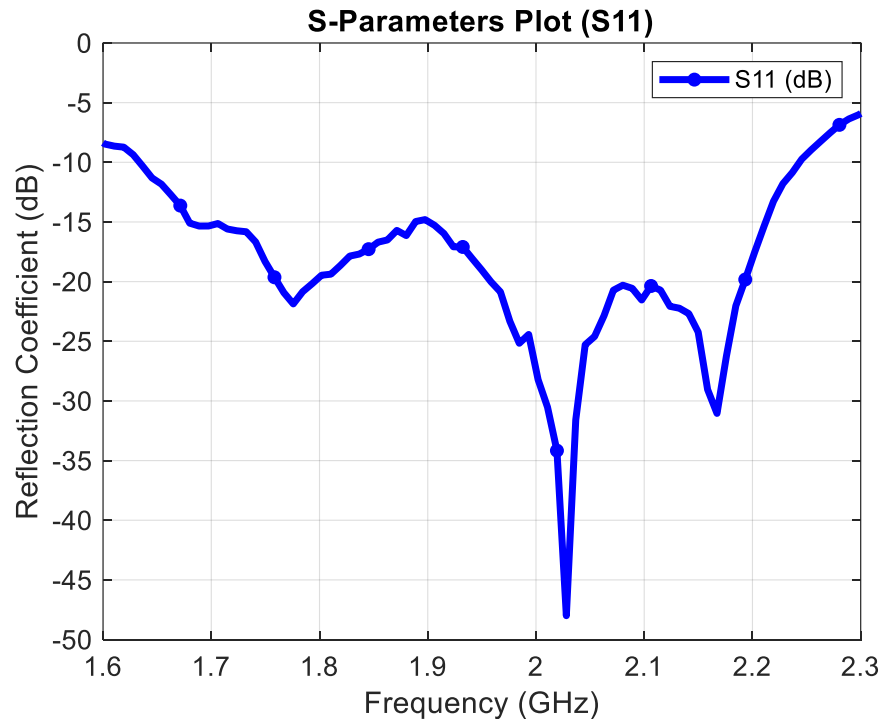

Measured Radiation pattern at 1800 MHz – 4.45 dBi